


PLC H 463 \$\dip x 1600 \$\dip PX colour: RAL 9005

Angled regulating valves set, chrome Pipe-masking set, chrome



TERMA | www.termaheat.com 20180719 Malkowski Przemysław page 2 of 6

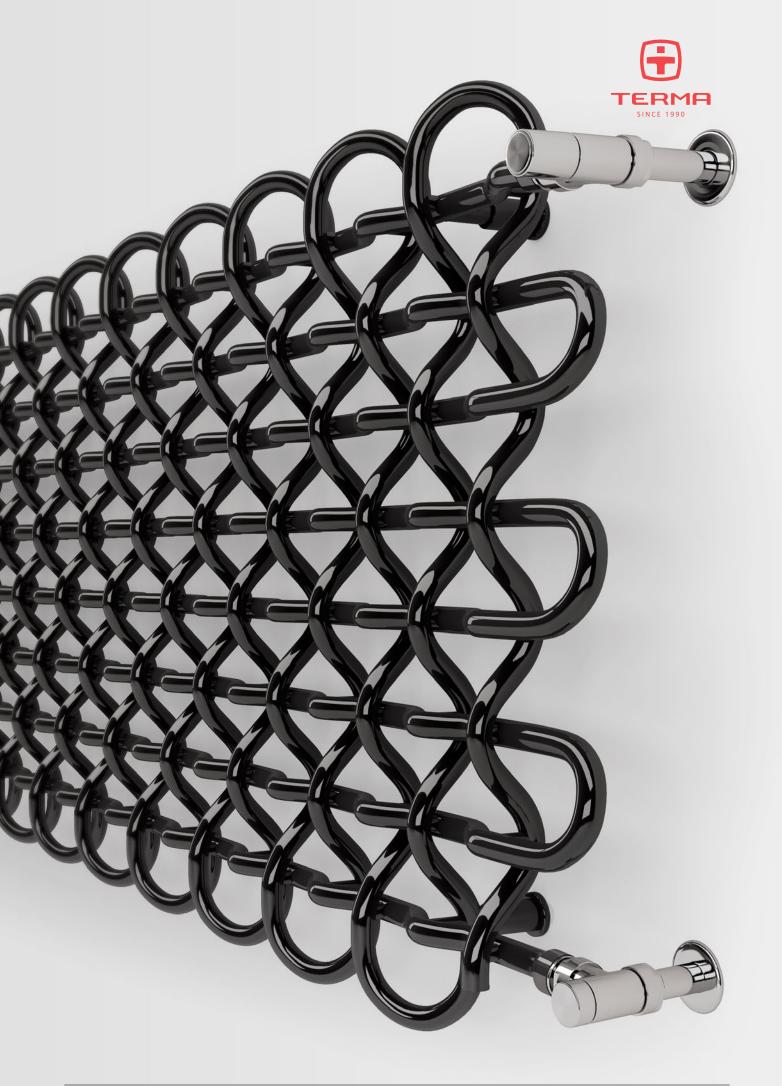




Design : Terma


Standard connection:





Available sizes:





463 x 1600

Specification:


Working pressure: 1000 kPa Maximum operating temperature: 95°C

A ↓ [mm]	$B \leftrightarrow [mm]$	C3 [mm]	75 65 20°c [W]	55 45 20°c [w]	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product code Configuration code p. 5
263	1600	150	341	174	1350	150	56,5	1,27	7,36	WGPLH026160
463	1600	350	622	317	1350	350	56,5	2,40	13,66	WGPLH046160






Technical drawing:

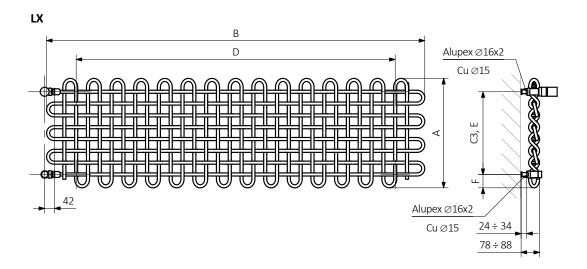

PΧ

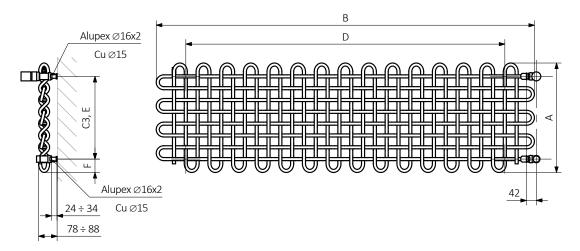

 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

Pipe:







In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water radiator product and configuration code:

WGPLH026160

K916LX

PRODUCT CODE (located in the table for the product) CONFIGURATION CODE (supplemented by hand)

Example Configuration

Package code K - carton box

Colour code

Connection code

Epoxy primer

E – Code of epoxy primer is an extra processes.



WGPLH026160 K916LX E Extra processes or additions code







Legend

