





Kioto One 1185 \$\times \times 480 \$\displays \$8\$

colour: RAL 7022

Angled integrated thermostatic valve set with immersion tube, left, chrome Integrated pipe-masking set, chrome ONE heating element



20190521 MałkowskiPrzemysław TERMA | www.termaheat.com page 2 of 6





Projekt : Terma

Standard connections:







Electric radiators:







Available sizes:









Electrical specification:

Power supply: 230 V / 50 Hz

Device protection class: Class I

Ingress protection [IP]: IPx5

Specifications:

Working pressure: 1000 kPa Maximum operating temperature: 82°C

A ↓ [mm]	$B \leftrightarrow [mm]$	75 65 20°c [W]	55 45 20°c [W]	(W)	D [mm]	E [mm]	F [mm]	[dm³]	[kg]	Product Code configuration code p. 5
870	480	476	255	400	390	720	75	2,96	10,7	WZKIN087048
1185	480	628	336	600	390	1035	75	4,00	14,31	WZKIN118048
1500	480	780	415	800	390	1350	75	5,04	17,92	WZKIN150048
1815	480	932	496	1000	390	1665	75	6,08	21,53	WZKIN181048


TERMA | www.termaheat.com 20190521 MalkowskiPrzemyslaw page 3 of 6







Technical drawing:

S8



S1



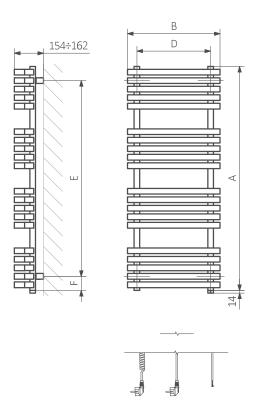

A - Height B - Width C1-C5 - Distance between pipe centres D - Horizontal distance between mounting bracket centres E - Vertical distance between mounting brackets F - Distance between a mounting bracket and the bottom of the radiator

Collector: Pipe:





In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a configuration code of a water radiator with a built-in One heating element:

WZKIN087048

K916S1

Cable Type

PRODUCT CODE (located in the table for the product)

CONIGURATION CODE (supplemented by hand)

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

Example Configuration



The Construction of the product and configuration code for a radiator with the built-in heating element ONE:

WWKIN087048

K916F1

Cable Type

PRODUCT CODE (located in the table for the product)

CONIGURATION CODE (supplemented by hand)

W - straight cable with plug
P - straight cable without plug
U - spiral cable with plug

page 5 of 6

Example Configuration



Epoxy primer

E - Code of epoxy primer is an extra processes.


WZKIN087048 K916S1







Legend

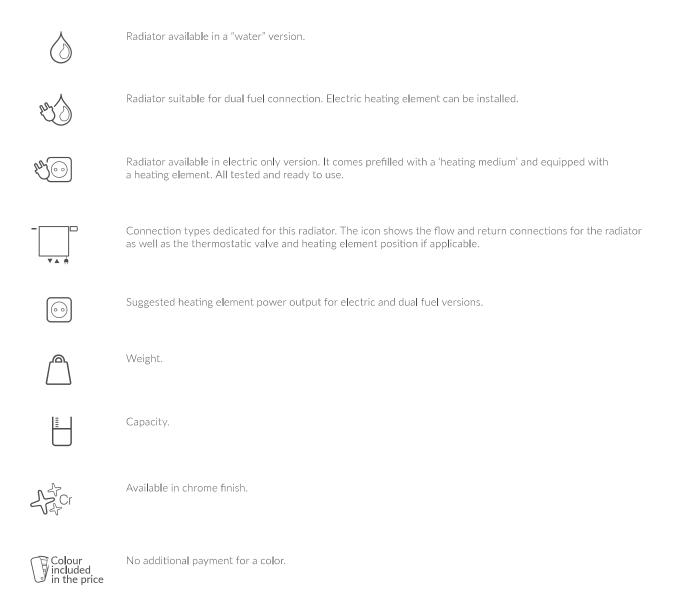

TERMA | www.termaheat.com 20190521 MalkowskiPrzemysław page 6 of 6